

LWDX3 (DX-63) series miniature circuit breaker is mainly suitable for overload and short circuit protection. It is especially used for illumination and distribution in industrial and commerce, ect. It has pleasing outlook and shock resistance for long service life. It is within the circuit of AC 50/60Hz, rated voltage of single pole up to 230V, 2, 3, and 4 poles up to 400V. It can also be used for an unfrequent change over of the circuit and illumination under normal conditon. The products meet with IEC60898 EN standards



Product Specification



LWDX3 (DX-63) Series

Number of Poles	1P, 2P, 3P, 4P
Rated Current (A)	1,2,3,4,6,10,16,20,25,32,40,50,63
Breaking Capacity (A)	6000
Rated Voltage (V)	230/400
Rated Frequency	50/60Hz
Endurance	≥4000
Circumstance Temperature	-5°C ~ +40°C
Electrical Life	No less than 6000 operations
Mechanical Life	(o-c) no less than 20000 operations
Protection Level	IP20

Characteristic Curve

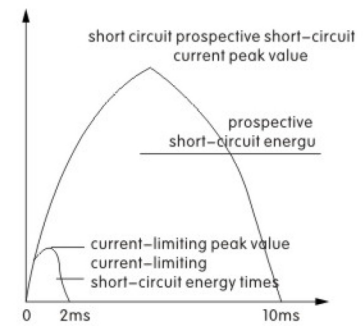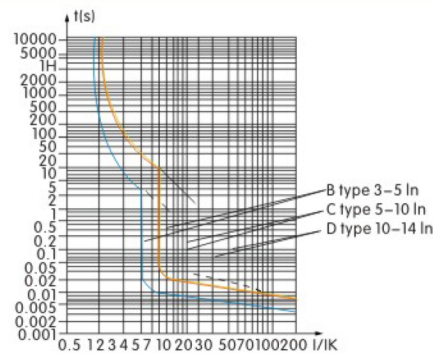

Dimensions

